


R3M(H)

25


参数	工作温度 (
----	--------

封装形式	波长 (nm)	功率 (W)	型号
R3M(H)	450/808	4/8.5	R450/808±10-4/8.5WD-R3M(H)-PFS
	450/980	4/10	R450/980±10-4/10WD-R3M(H)-PFS
	450/638/808	4/0.5/8.5	R450/638/808±10-4/0.5/8.5WD-R3M(H)-PFS
	450/638/980	4/0.2/10	R450/638/980±10-4/0.2/10WD-R3M(H)-PFS
	450/638/980	4/0.5/10	R450/638/980±10-4/0.5/10WD-R3M(H)-PFS

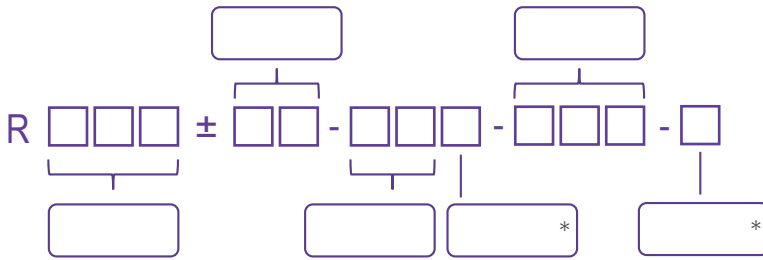


- * D -
- * P -
- FS -

mm

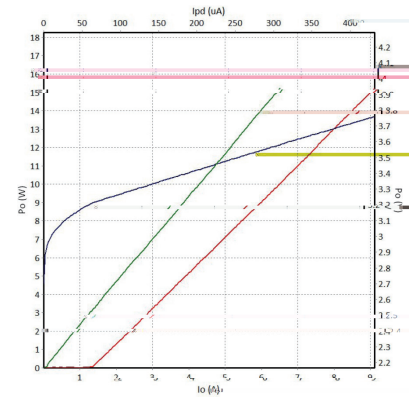

808nm P-I-V

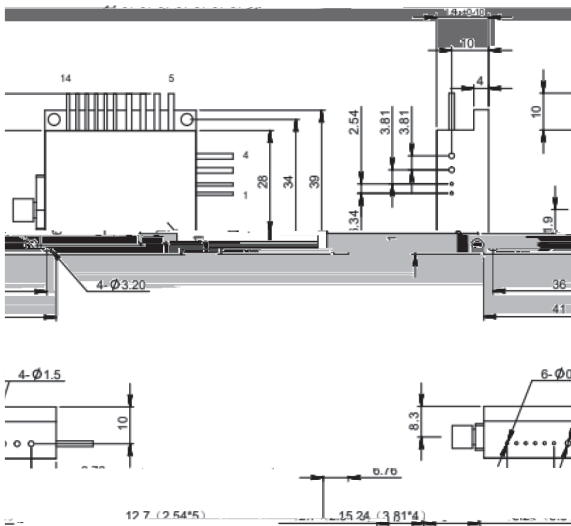

引脚	功能	引脚	功能
1		8	450nm +
2		9	PD(P)
3	980(808)nm +	10	650(638)nm -
4	980(808)nm -	11	650(638)nm PD N +
5	-	12	PD P
6	-	13	LED + PD N
7	450nm -	14	LED -

